



P3CARS.COM  
PRECISION • PASSION • PERFORMANCE

Please download the latest copy of this document from [www.p3cars.com/install](http://www.p3cars.com/install)


# Mini R53



**1** Using your finger or a soft trim pry tool open the side dash cover panel.



**2** Twist to release the silver appearance trim ring. Use a gentle twisting to the left motion as shown.

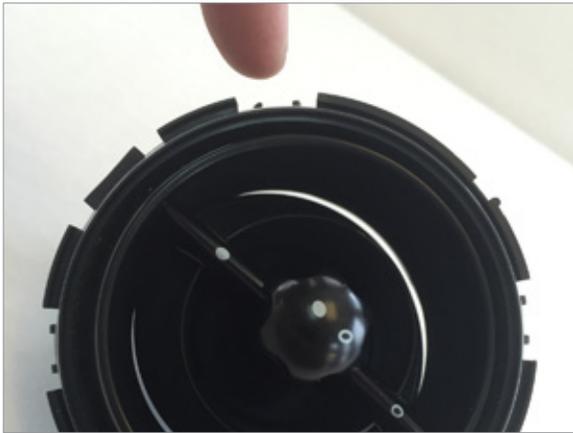


**3** You will now need to locate the 4 clip tabs that hold the vent housing in the dash.



**4** Slide a very small flat head screw driver in the middle of each tab where it is open and between the two grab clips that are on each tab as shown.

**WARRANTY & LIABILITY:**  
Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.

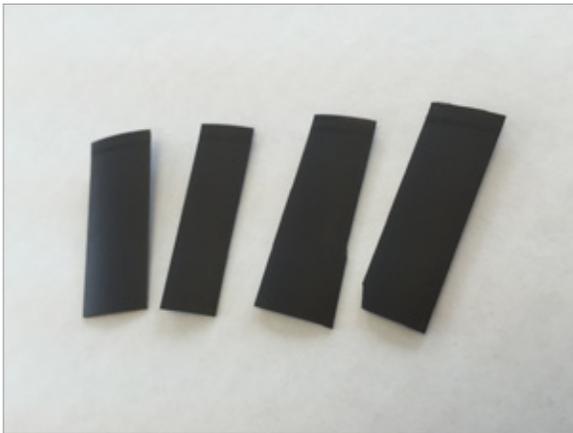

**5** Fashion 4 shims roughly the same size as each of the vent's clips. We used an old spray can lid. You could use an old credit card or anything that is plastic, thin and flexible.



**6** While holding the clip down with your small flat head screw driver insert a shim between the clip and the dash.



P3CARS.COM  
PRECISION • PASSION • PERFORMANCE

Please download the latest copy of this document from [www.p3cars.com/install](http://www.p3cars.com/install)



**7** Once you have inserted all 4 of your shims pull the vent housing straight out toward you.

**9** Plug in the diagnostic port connector into the port under your dash. We recommend you pull off the now superfluous cap and set it aside along with your original vent housing. You can feed the cable up under the lower dash cover between the dash cover and the port itself or if you plan on unplugging it and plugging something else in frequently just feed it back to the left and up between the side firewall and dash trim and up into the side dash area. If you have purchased the extension cable feed it to the right between the port and the lower dash trim piece then up into the side dash area. Connect to control box and tighten connectors. If you have removed your lower dash trim simply grab the display cable and plug it in to the control box and reinstall lower dash trim. If you have left it in place reach your hand into the vent opening feeding the display cable under the steering column (this will be visible between the column and the lower dash panel. Once you have the cable feed as far to the left as you can reach it you can now grab it on the left side in the side dash area and simply plug into the control box.



**10** Tuck control box and wiring snugly in the side dash area who's panel you removed in step one.

**8** Feed display cable on your VIDI into the vent cavity and to the left.

**11** Install vent firmly in dash. All four clips will make contact.

**12** Reinstall vent trim ring by turning to the right until it clicks on.

**13** Reinstall side dash cover panel.

**WARRANTY & LIABILITY:**

Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.



P3CARS.COM

PRECISION • PASSION • PERFORMANCE

Please download the latest copy of this document from [www.p3cars.com/install](http://www.p3cars.com/install)



**14** Now you are ready to enjoy your P3Cars VIDI for Mini R53.

**WARRANTY & LIABILITY:**

Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.